

# ANCHOR SWIVEL FORERUNNER


## TECHNICAL DATA SHEET

The Swivel Forerunner is a chain connector installed between the anchor and anchor chain, incorporating an integrated swivel to reduce torsional loading and minimise chain twist during deployment and recovery.

Manufactured to ISO-equivalent dimensions and classification society requirements, it comprises an anchor-side end link suitable for D-shackle connection, combined with a chain-compatible side and integrated swivel. Available in U2 and U3 grades, with hot-dip galvanised or painted finishes, Swivel Forerunners are supplied with LR (Lloyd's Register) or DNV certification available to suit common anchor chain configurations. Ocean Force is a leading Australian supplier of Anchor Swivel Forerunners.

### Applications

- **Anti-Twist Swivel:** Reduces torsional loading and chain twist during anchor deployment and recovery
- **ISO 1704 compliant:** designed to classification society standards
- **Connection-Ready:** Anchor side accepts D-shackle; chain side compatible with Kenter joining shackles
- **Grade & Finish Options:** U2 / U3 grades, galvanised or painted
- **Stock Availability:** Matching chain sizes held in stock for fast delivery

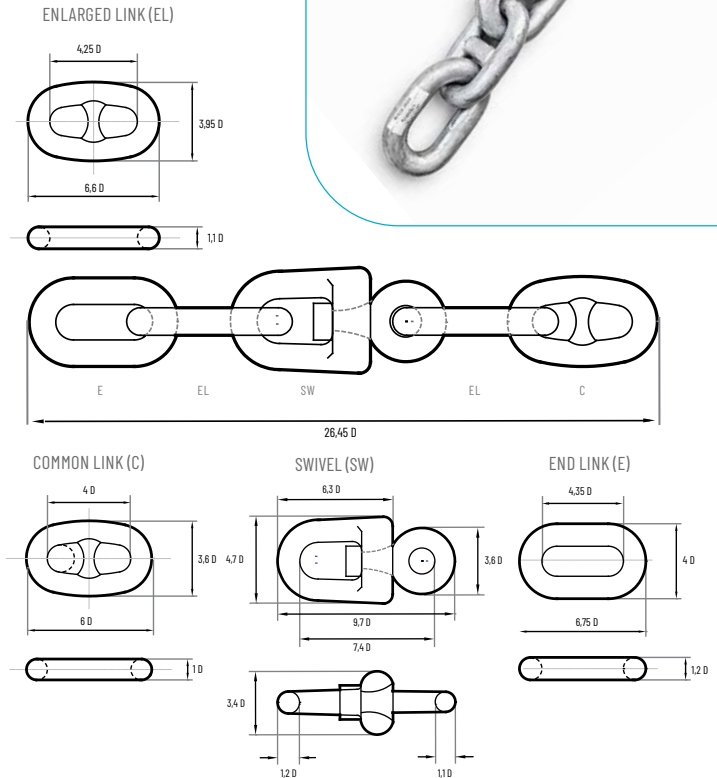

### Specifications

Finishes: G - Galvanised B - Black

Product Code	Chain Diameter D (mm)	Proof Load (kN) Grade 2	Breaking Load (kN) Grade 2	Stud Link Chain kg/27.5m
SLS12.5G	12.5	66	92	102
SLS14G	14	82	116	142
SLS16G	16	107	150	175
SLS17.5G	17.5	127	179	197
SLS19G	19	150	211	245
SLS20.5G	20.5	175	244	268
SLS20.5K2G	20.5	175	244	268
SLS22G	22	200	280	324
SLS24B	24	237	332	370
SLS24G	24	237	332	370
SLS26B	26	278	389	431
SLS28B	28	321	449	496
SLS32B	32	417	583	635
SLS38B	38	581	812	888
SLS44B	44	769	1080	1197
SLS50B	50	981	1370	1546

Measurements in tables may vary between different models. Ocean Force strives to ensure accuracy but encourages customers to contact us with any questions.