

# PLOUGH ANCHOR

## TECHNICAL DATA SHEET

The Plough Anchor is a proven design, engineered for dependable performance across varied seabeds including sand, mud, gravel and light weed.

Its single plough-shaped fluke penetrates quickly and deeply, providing secure holding even under shifting wind or tide. Available with fixed or hinged shank options, the design maximises seabed alignment for optimal grip. A weighted tip ensures rapid self-righting during deployment, while chisel-edged geometry enhances penetration. Manufactured from high-grade marine steel and hot-dip galvanised for durability. We're a leading Australian Plough Anchor Supplier, with a range of sizes always in stock.

**Nominal Weight:** 5kg-160kg in stock


**Finishing:** Hot dip galvanized

**Certificates:** LRS, DNV, ABS and BV

Larger sizes, finishes and certificates available on request.

## Applications

- **Primary anchor** for yachts, sailboats and fishing vessels
- **Workboats and small commercial craft** operating across varied seabeds
- **Research vessels** requiring compact, high holding power
- **Military craft** with multi-terrain anchoring requirements
- **Offshore and coastal vessels** needing a reliable all-round anchor solution

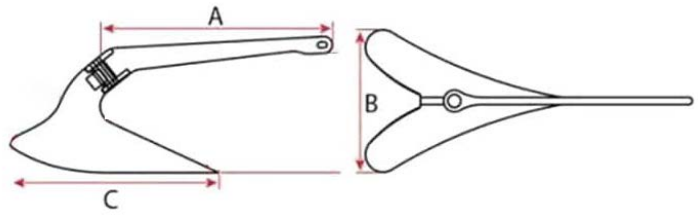

## Specifications

Product Code	Anchor Weight		Boat Length (m)	Dimensions (mm)	
	(kg)	(lb)		A	B
AP010	5	11	6	370	220
AP015	7	16	7	430	230
AP020	9	20	7	480	280
AP027	12	26	8	520	310
AP035	15	33	11	580	330
AP045	22	49	14	600	380
AP060	27	60	19	660	450
AP080	36	80	21	740	460
AP100	48	100	24	740	530
AP120	55	120	27	820	540
AP140	65	140	-	870	550
AP160	73	160	-	990	560
AP180	82	180	-	1010	600
AP200	91	200	-	1020	660
AP220	100	220	-	1020	680
AP250	113	250	-	1060	700
AP350	136	350	-	1060	760

Measurements in tables may vary between different models. Ocean Force strives to ensure accuracy but encourages customers to contact us with any questions.